




VAPOR ECHO RECTILINEAR

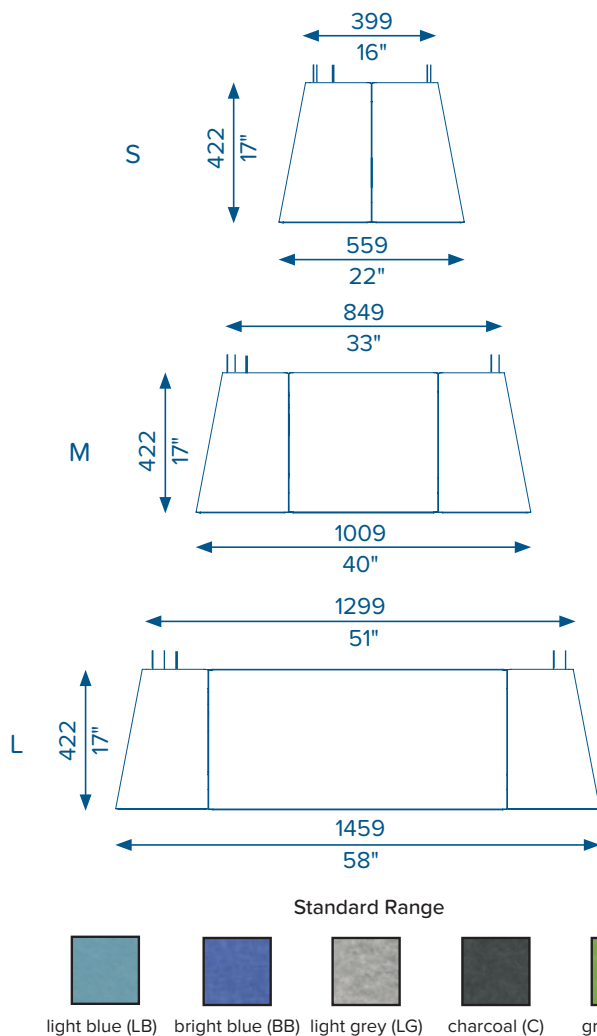


The Vapor Echo Rectilinear acoustic pendant shares the same strong profile as the Vapor Echo to help hush open spaces. Made from 0.5inch acoustic panels, the Vapor Echo Rectilinear offers a bold square or rectangular design for highly effective sound management. Available in 3 sizes and a wide range of colors.

KEY FEATURES

- Available in 3 sizes and a wide range of colors
- Segments made from 0.5" acoustic panel
- Highly effective sound absorption: Class D NRC 0.45 - Class C NRC 0.70
- 4 suspension cables, 9' total length, height adjustable
- Supplied with 9.8' woven power cable
- Suitable for indoor environments
- Class A, FS:5 - SD:25 fire rated (USA)
- Minimum 65% recycled material
- IES files available
- ELV dimming compatible
- Acoustic properties independently tested
- Optional upwards LED wash lighting available

Premium Range A

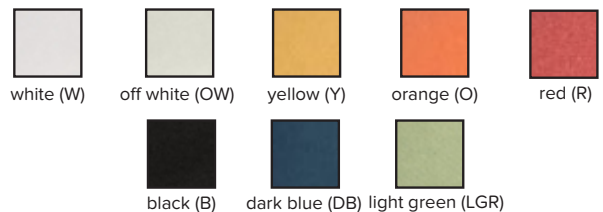

Premium Range B



Luxxbox reserves the right to change the specification, material and colours at any time without notice. Standard warranty terms and conditions apply. All rights reserved. © October 2018 Ver 2.3

LUXXBOX PTY LTD × ACN 123 193 788 × 43 KENYON ST EAGLE FARM QLD 4009 AUSTRALIA
 INFO@LUXXBOX.COM × LUXXBOX.COM
 +1 (415) 871 0448 × USA@LUXXBOX.COM





VAPOR ECHO RECTILINEAR

HOW TO SPECIFY

LX-VER = (Size) - (Color) - (Upwards Light) - (Dimming)

Size	Shade Color	Color temperature	Upwards Wash Light	Dimming	Voltage
S = 22" L x 22" W x 17"H	Specify color from range shown above	30 = 3000k	Y = Yes	ELV = ELV compatible ¹	120V
M = 40" L x 22" W x 17" H		35 = 3500k	N = No	0-10V ²	277V ³
L = 58" L x 22" W x 17" H		40 = 4000k			

Example: LX-VER-S-LG-30-N-ELV-120V = Luxxbox Vapor Echo Rectilinear, small, light grey, 3000k, no wash light, ELV, 120V

¹ ELV dimming not available on 277V configurations

² 0-10V Dimming options available upon request

³ 277V options available upon request using remotely mounted stepdown transformer

DIMMING OPTIONS

100%-10% dimming is compatible with the following ELV dimmers:

- Lutron Nova NLV-600-WH
- Lutron Maestro MAELV-600-WH
- Lutron Diva DVELV-303P-WH
- Leviton VIZIA + Decora Cat-NO.VPE06-1LZ
- Leviton Decora DSE06-10Z
- Leviton Illumatech Slide Dimmer IPE04-1LZ

Luxxbox reserves the right to change the specification, material and colours at any time without notice. Standard warranty terms and conditions apply. All rights reserved. © October 2018 Ver 2.3

LUXXBOX PTY LTD × ACN 123 193 788 × 43 KENYON ST EAGLE FARM QLD 4009 AUSTRALIA

INFO@LUXXBOX.COM × LUXXBOX.COM

+1 (415) 871 0448 × USA@LUXXBOX.COM





VAPOR ECHO RECTILINEAR

LIGHT SOURCE SPECIFICATIONS

All Vapor Echo Rectilinear LED luminaires are equipped with LED boards of the following specification:


- S – 2400 lumen, 120VAC, CRI 80, 27W
- M – 4800 lumen, 120VAC, CRI 80, 53W
- L – 9600 lumen, 120VAC, CRI 80, 106W

LIGHT SOURCE SPECIFICATIONS WITH UP/DOWN WASH

All Vapor Echo Rectilinear LED luminaires are equipped with LED boards of the following specification:

- S – 4800 lumen, 120VAC, CRI 80, 54W
- M – 9600 lumen, 120VAC, CRI 80, 106W
- L – 19200 lumen, 120VAC, CRI 80, 212W

LUMINOUS INTENSITY DISTRIBUTION

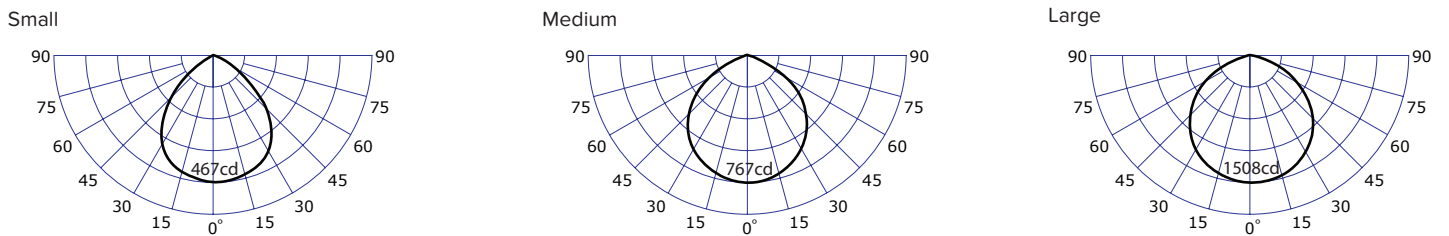

Luxxbox reserves the right to change the specification, material and colours at any time without notice. Standard warranty terms and conditions apply. All rights reserved. © October 2018 Ver 2.3

LUXXBOX PTY LTD × ACN 123 193 788 × 43 KENYON ST EAGLE FARM QLD 4009 AUSTRALIA
 INFO@LUXXBOX.COM × LUXXBOX.COM
 +1 (415) 871 0448 × USA@LUXXBOX.COM







VAPOR ECHO RECTILINEAR

CANOPY LOCATIONS


Small 4 suspension points

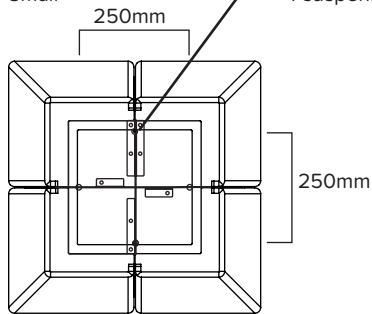

Medium

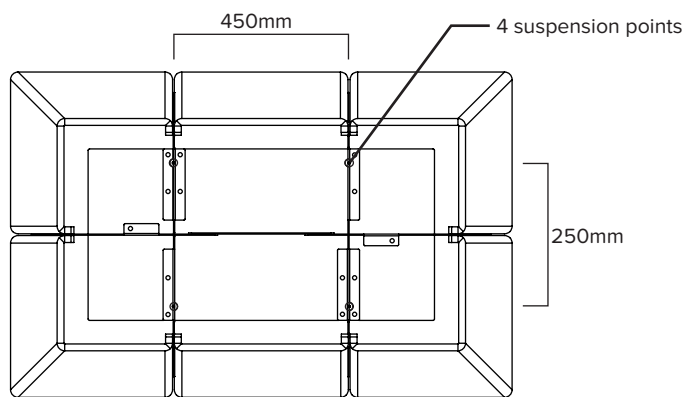

Large

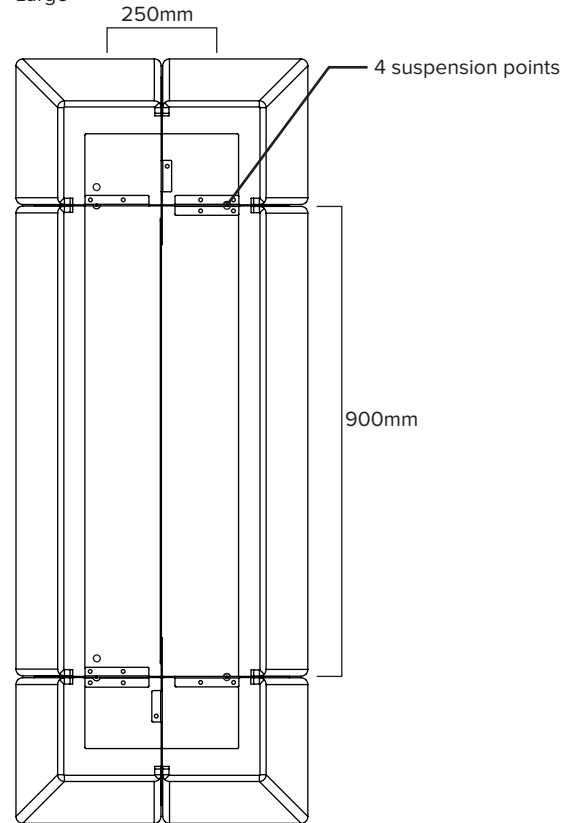

Luxxbox reserves the right to change the specification, material and colours at any time without notice. Standard warranty terms and conditions apply. All rights reserved. © October 2018 Ver 2.3

LUXXBOX PTY LTD × ACN 123 193 788 × 43 KENYON ST EAGLE FARM QLD 4009 AUSTRALIA

INFO@LUXXBOX.COM × LUXXBOX.COM


+1 (415) 871 0448 × USA@LUXXBOX.COM



VAPOR ECHO RECTILINEAR INSTALLATION

⚠ Before starting, determine which fasteners will be best suited to secure the fitting, based on the material of the ceiling substrate.

1. Mount canopy base to 4" Jbox
2. Insert power cable into canopy cover. Adjust lengths of cable and trim if necessary.
3. Fasten power cable strain relief grub screw
4. Connect line voltage to terminals provided, making sure you connect the ground wire
5. Place canopy over canopy mount and fasten 3x screws

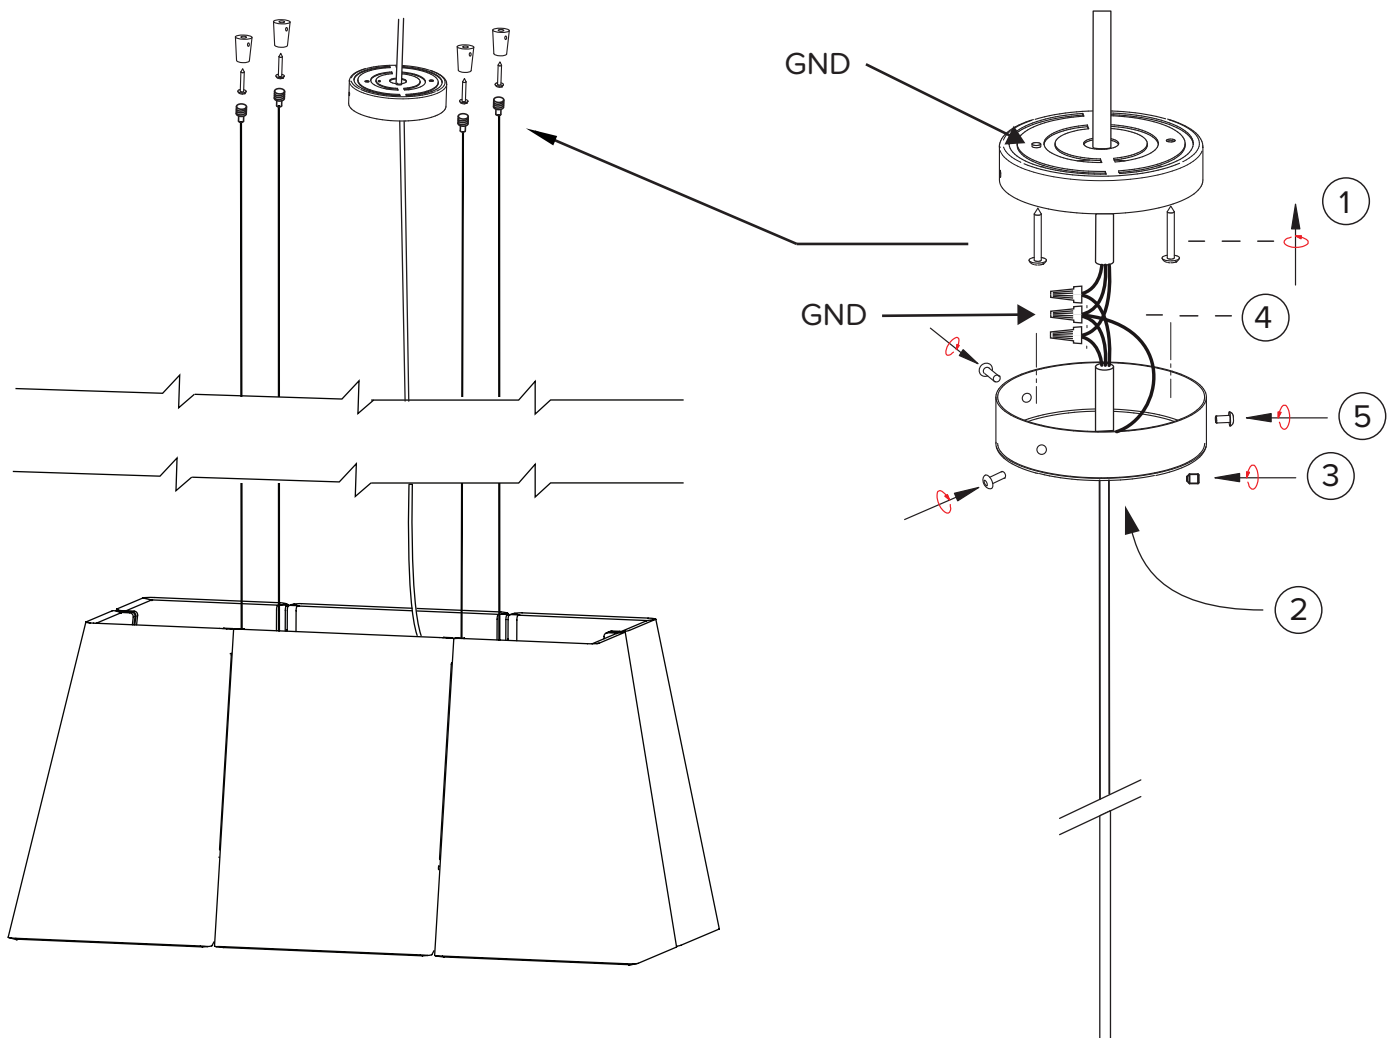


Note: Line voltage must be installed by a qualified electrician, in accordance with local electrical laws.

Luxxbox reserves the right to change the specification, material and colours at any time without notice. Standard warranty terms and conditions apply. All rights reserved. © October 2018 Ver 2.3

LUXXBOX PTY LTD × ACN 123 193 788 × 43 KENYON ST EAGLE FARM QLD 4009 AUSTRALIA
INFO@LUXXBOX.COM × LUXXBOX.COM
+1 (415) 871 0448 × USA@LUXXBOX.COM



STANDARD CEILING MOUNT – INSTALLATION

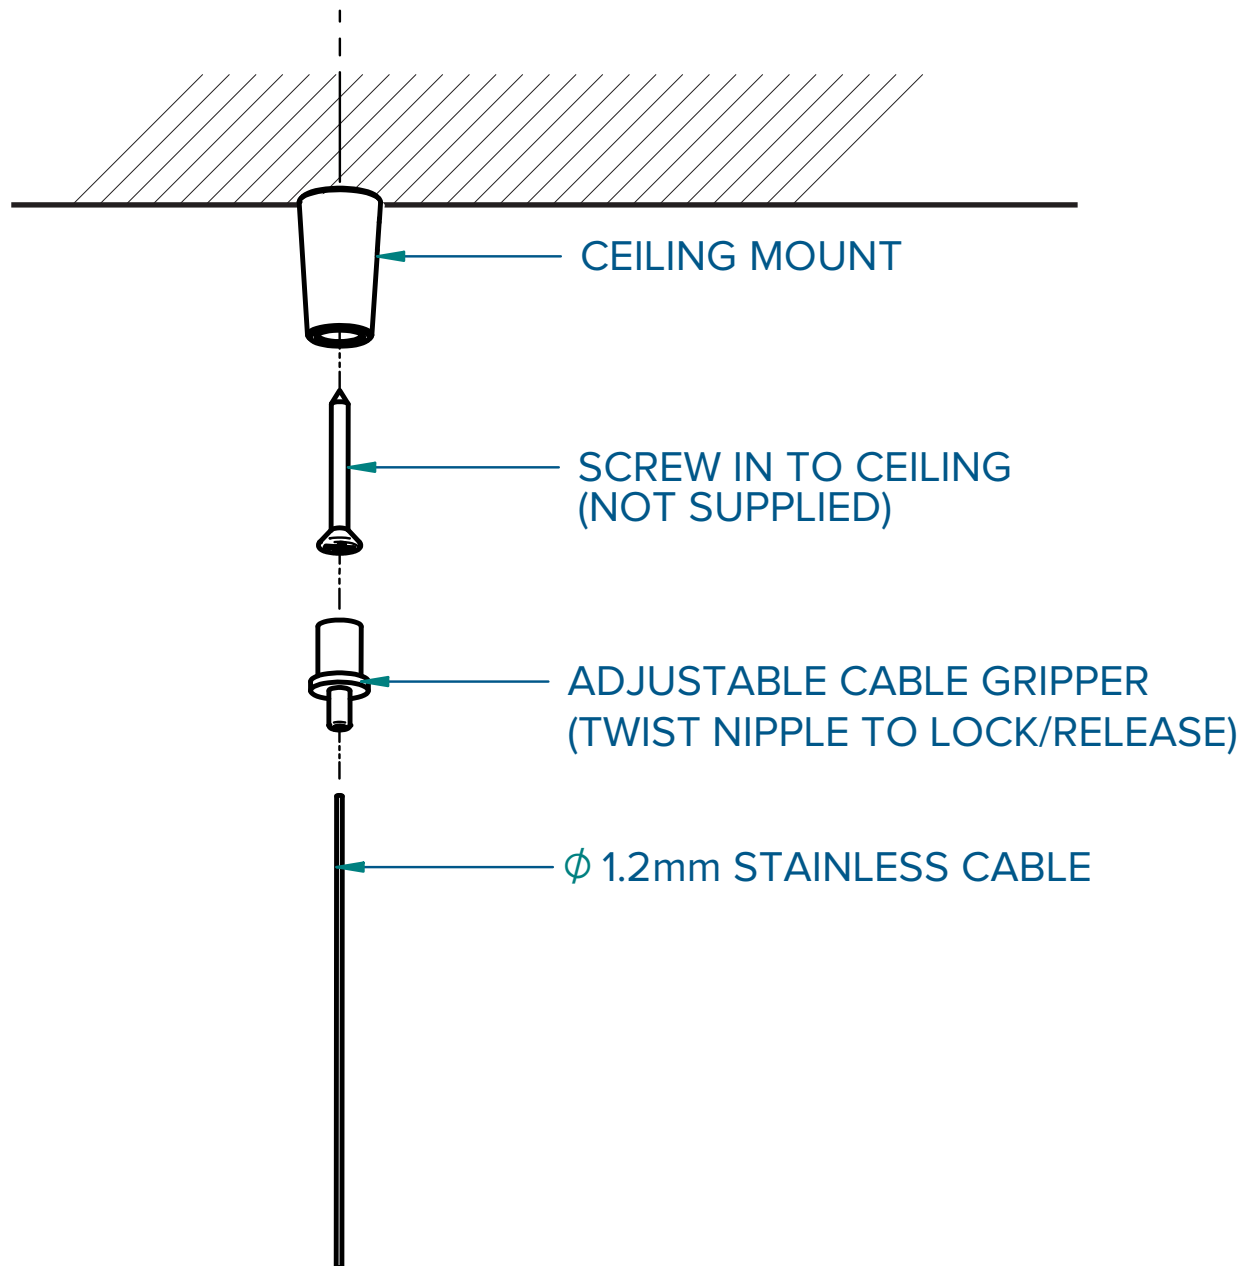

Luxxbox reserves the right to change the specification, material and colours at any time without notice. Standard warranty terms and conditions apply. All rights reserved. © October 2018 Ver 2.3

LUXXBOX PTY LTD × ACN 123 193 788 × 43 KENYON ST EAGLE FARM QLD 4009 AUSTRALIA

INFO@LUXXBOX.COM × LUXXBOX.COM

+1 (415) 871 0448 × USA@LUXXBOX.COM




STANDARD CEILING MOUNT - INSTALLATION



← Masonry plug, wall mate or similar - type to be determined by installer. Not supplied.



← Ceiling mount, Supplied



← Screw in to ceiling substrate - type to be determined by installer. Not Supplied



← Cable gripper with grip lock nipple. Supplied.



← 1.2mm Stainless suspension cable. Supplied.



Shown assembled

Luxxbox reserves the right to change the specification, material and colours at any time without notice. Standard warranty terms and conditions apply. All rights reserved. © October 2018 Ver 2.3

LUXXBOX PTY LTD × ACN 123 193 788 × 43 KENYON ST EAGLE FARM QLD 4009 AUSTRALIA
INFO@LUXXBOX.COM × LUXXBOX.COM
+1 (415) 871 0448 × USA@LUXXBOX.COM

