





BIRDCAGE

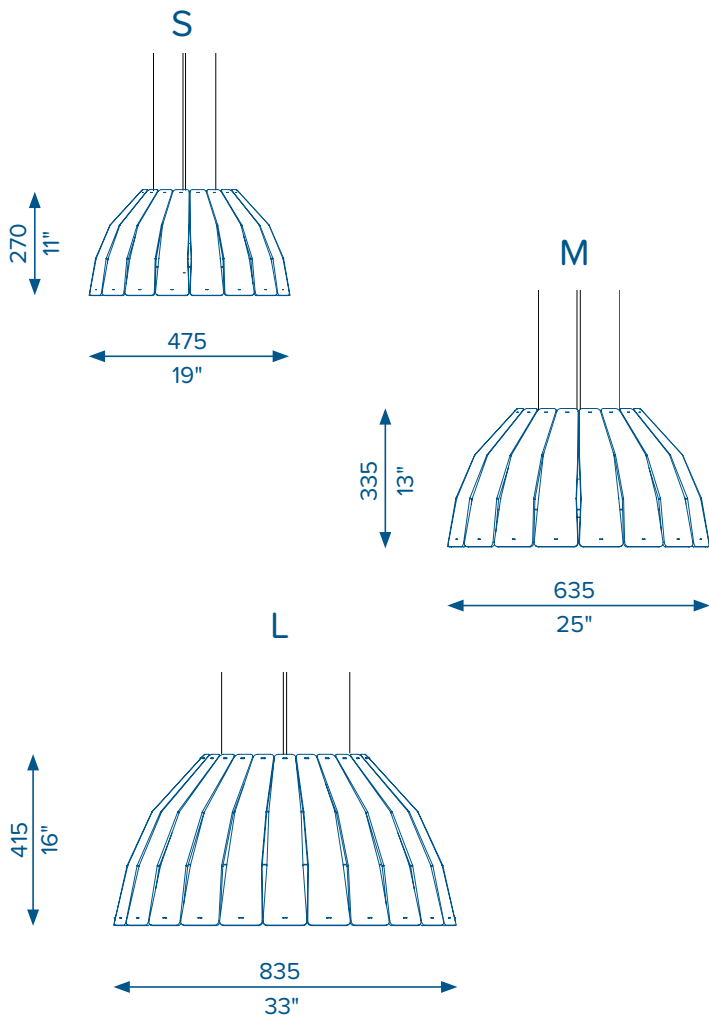

The elegant Birdcage pendant is part of Luxxbox's decorative pendant series made from acoustically rated panels. Adding a decorative touch to open plan collaborative spaces, the Birdcage is constructed from 0.3inch acoustic panels for highly effective sound management.

KEY FEATURES

- Available in 3 sizes and a wide range of colors
- Segments made from 0.3" acoustic panels
- Effective sound absorption
- Supplied with 3 suspension cables, 9' total length, height adjustable
- Supplied with 9.8' woven power cable
- Suitable for indoor environments
- Class A, FS:5 - SD:25 fire rated (USA)
- Minimum 65% recycled material
- IES files available
- ELV dimming compatible
- Acoustic properties independently tested
- Optional E26 lamp holder

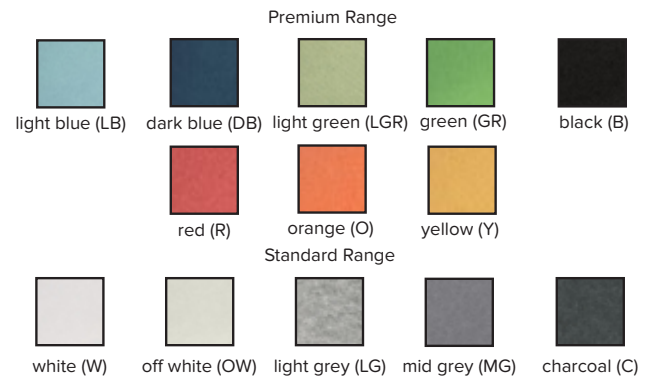

Luxxbox reserves the right to change the specification, material and colours at any time without notice. Standard warranty terms and conditions apply. All rights reserved. © October 2018 Ver 2.6

LUXXBOX PTY LTD × ACN 123 193 788 × 43 KENYON ST EAGLE FARM QLD 4009 AUSTRALIA
 P +61 7 3257 2822 × INFO@LUXXBOX.COM × LUXXBOX.COM
 P +1 (415) 871 0448 × USA@LUXXBOX.COM



BIRDCAGE

HOW TO SPECIFY

LX-BC = (Size) - (Color) - (Color temperature) - (Dimming) - (Voltage)

Size	Shade Color	Color temperature	Dimming	Voltage
S = dia 19" x 11" H	Specify color from range shown above	30 = 3000k	ELV = ELV compatible ¹	120V
M = dia 25" x 13" H		35 = 3500k		277V
L = dia 33" x 16" H		40 = 4000k	0-10V ²	

Example: LX-BC-S-LG-30-ELV-120V = Birdcage, Small, Light Grey, 3000k, ELV dimming compatible, 120VAC

¹ ELV dimming not available on 277V configurations

² 0-10V Dimming options available upon request

LIGHT SOURCE SPECIFICATIONS

All Birdcage LED luminaires are equipped with LED boards of the following specification:

S – 2500 lumen, 120VAC, CRI 80, 29W

M – 2500 lumen, 120VAC, CRI 80, 29W

L – 6000 lumen, 120VAC, CRI 80, 61W


DIMMING OPTIONS

100%-10% dimming is compatible with the following ELV dimmers:


- Lutron Nova NLV-600-WH
- Lutron Maestro MAELV-600-WH
- Lutron Diva DVELV-303P-WH
- Leviton VIZIA + Decora Cat-NO.VPE06-1LZ
- Leviton Decora DSE06-10Z
- Leviton Illumatech Slide Dimmer IPE04-1LZ

LUMINOUS INTENSITY DISTRIBUTION


Small

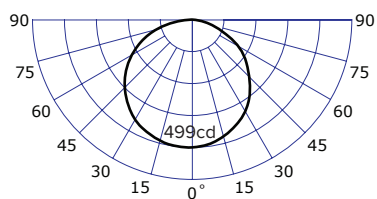

Medium

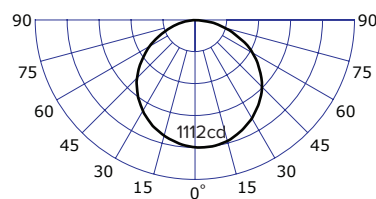

Large

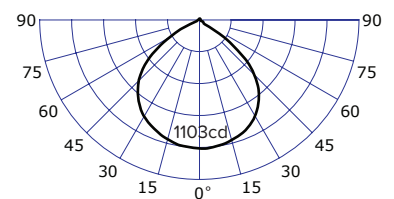

Luxxbox reserves the right to change the specification, material and colours at any time without notice. Standard warranty terms and conditions apply. All rights reserved. © October 2018 Ver 2.6

LUXXBOX PTY LTD × ACN 123 193 788 × 43 KENYON ST EAGLE FARM QLD 4009 AUSTRALIA

P +61 7 3257 2822 × INFO@LUXXBOX.COM × LUXXBOX.COM

P +1 (415) 871 0448 × USA@LUXXBOX.COM




**luxx
box**




BIRDCAGE CANOPY LOCATIONS

Small




PCD = 120mm
3 points equally spaced at 120°

Large

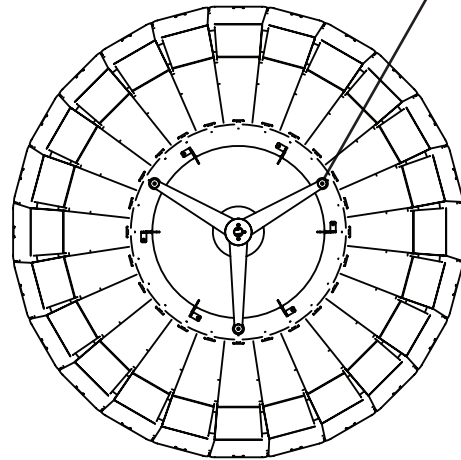

PCD = 360mm
3 points equally spaced at 120°

Medium

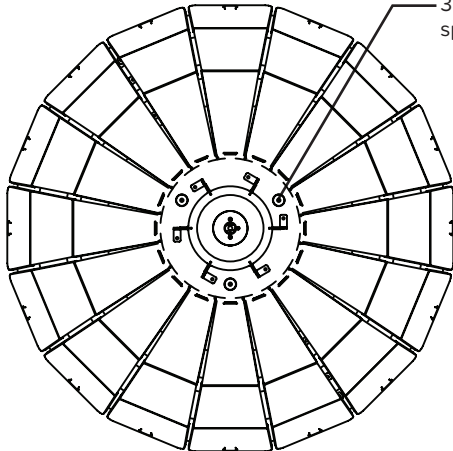


PCD = 160mm
3 points equally spaced at 120°

Luxxbox reserves the right to change the specification, material and colours at any time without notice. Standard warranty terms and conditions apply. All rights reserved. © October 2018 Ver 2.6

LUXXBOX PTY LTD × ACN 123 193 788 × 43 KENYON ST EAGLE FARM QLD 4009 AUSTRALIA
P +61 7 3257 2822 × INFO@LUXXBOX.COM × LUXXBOX.COM
P +1 (415) 871 0448 × USA@LUXXBOX.COM



BIRDCAGE INSTALLATION

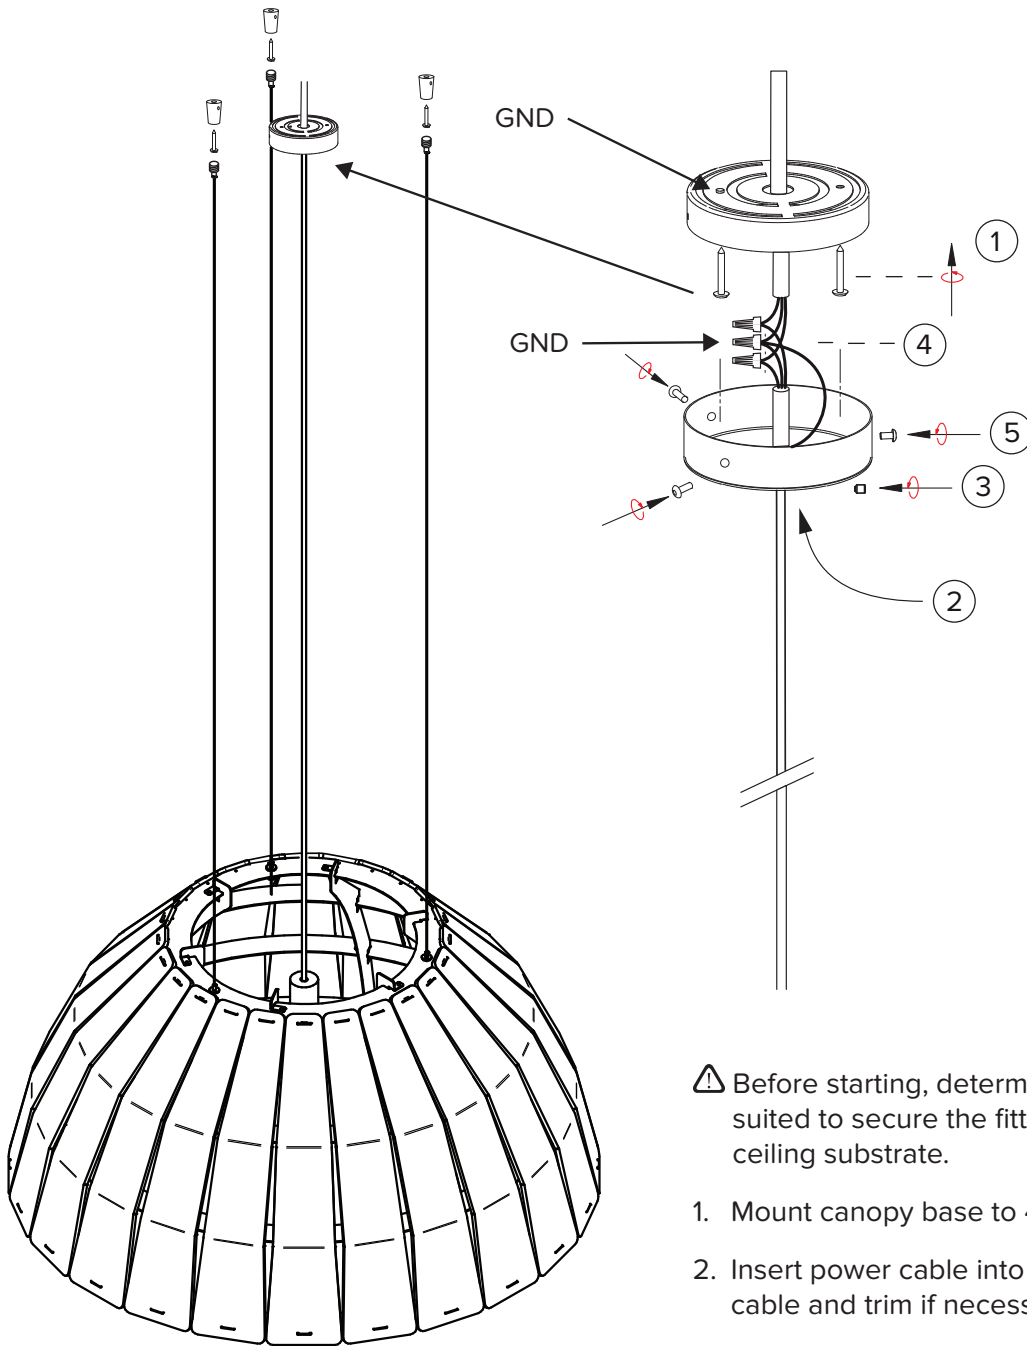

⚠ Before starting, determine which fasteners will be best suited to secure the fitting, based on the material of the ceiling substrate.

1. Mount canopy base to 4" Jbox
2. Insert power cable into canopy cover. Adjust lengths of cable and trim if necessary.
3. Fasten power cable strain relief grub screw
4. Connect line voltage to terminals provided, making sure you connect the ground wire
5. Place canopy over canopy mount and fasten 3x screws


Note: Line voltage must be installed by a qualified electrician, in accordance with local electrical laws.

Luxxbox reserves the right to change the specification, material and colours at any time without notice. Standard warranty terms and conditions apply. All rights reserved. © October 2018 Ver 2.6

LUXXBOX PTY LTD × ACN 123 193 788 × 43 KENYON ST EAGLE FARM QLD 4009 AUSTRALIA
P +61 7 3257 2822 × INFO@LUXXBOX.COM × LUXXBOX.COM
P +1 (415) 871 0448 × USA@LUXXBOX.COM



STANDARD CEILING MOUNT – INSTALLATION

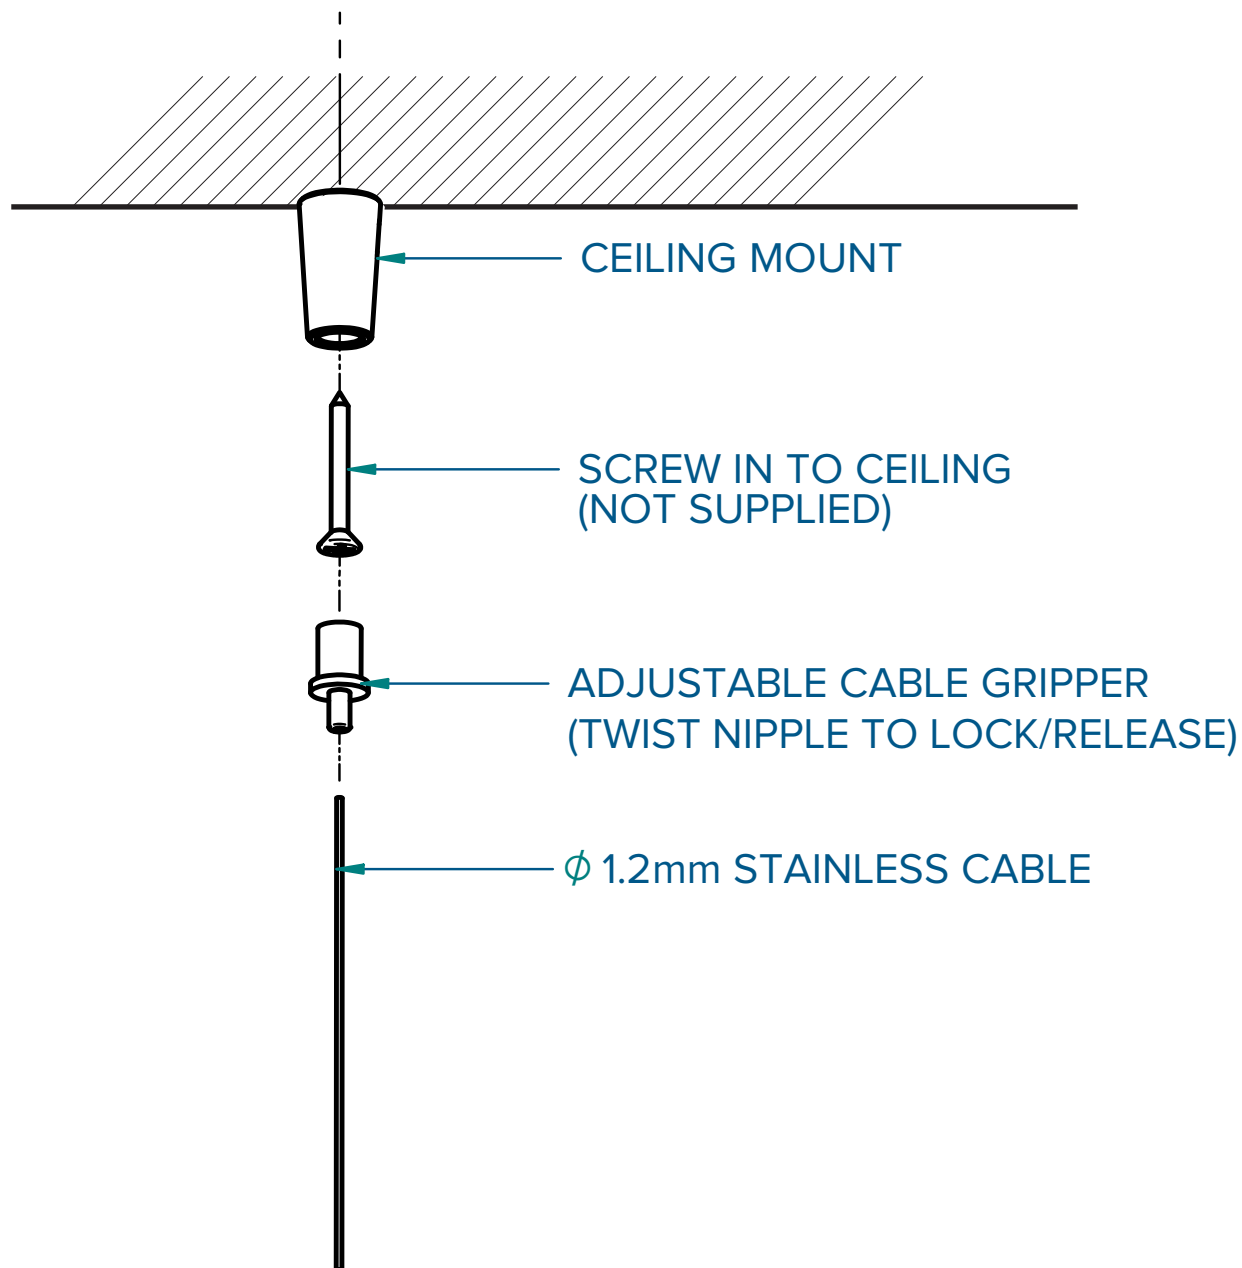

Luxxbox reserves the right to change the specification, material and colours at any time without notice. Standard warranty terms and conditions apply. All rights reserved. © October 2018 Ver 2.6

LUXXBOX PTY LTD × ACN 123 193 788 × 43 KENYON ST EAGLE FARM QLD 4009 AUSTRALIA
P +61 7 3257 2822 × INFO@LUXXBOX.COM × LUXXBOX.COM
P +1 (415) 871 0448 × USA@LUXXBOX.COM



luxx
box


STANDARD CEILING MOUNT - INSTALLATION



← Masonry plug, wall mate or similar - type to be determined by installer. Not supplied.



← Ceiling mount, Supplied



← Screw in to ceiling substrate - type to be determined by installer. Not Supplied



← Cable gripper with grip lock nipple. Supplied.



← 1.2mm Stainless suspension cable. Supplied.



Shown assembled

Luxxbox reserves the right to change the specification, material and colours at any time without notice. Standard warranty terms and conditions apply. All rights reserved. © October 2018 Ver 2.6

LUXXBOX PTY LTD × ACN 123 193 788 × 43 KENYON ST EAGLE FARM QLD 4009 AUSTRALIA
P +61 7 3257 2822 × INFO@LUXXBOX.COM × LUXXBOX.COM
P +1 (415) 871 0448 × USA@LUXXBOX.COM

