



# HEXY – ACOUSTIC WALL TILES

## Patterns



Diamond




Honeycomb



Brick

## Basic Dimensions

285mm  
11.2"




330mm  
13"



13mm  
0.5"

1 Tile = 0.76 sq. ft

300mm  
11.8"

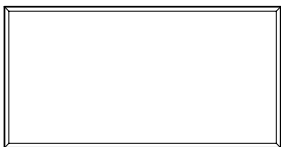

600mm  
23.6"



13mm  
0.5"

1 Tile = 2.01 sq. ft

The Hexy Acoustic Wall Tile system adapts to every space thanks to its modular design and allows you to sculpt the acoustics of any environment.

## KEY FEATURES

- Highly effective sound absorption
- NRC rating of 0.85
- 100% recyclable PET
- Class A fire rating
- Allows for different patterns
- Large range of colour options

## HOW TO SPECIFY

LX-HX-(Pattern)-(Colour)

Pattern	Colour
<b>H</b> = Hexagonal, dia 330mm(13") x 285mm(11.22")H	<b>Specify colour using codes below</b>
<b>D</b> = Diamond, dia 330mm(13") x 285mm(11.22")H	
<b>B</b> = Brick, 300mm(11.8") x 600mm(23.6")	

Example: **LX-HX-D-GR**




Luxxbox reserves the right to change the specification, material and colors at any time without notice. Standard warranty terms and conditions apply. All rights reserved. © October 2018 Ver 2.

LUXXBOX PTY LTD × ACN 123 193 788 × 43 KENYON ST EAGLE FARM QLD 4009 AUSTRALIA  
 P +61 7 3257 2822 × INFO@LUXXBOX.COM × LUXXBOX.COM  
 P +1 (415) 871 0448 × USA@LUXXBOX.COM




# HEXY - PATTERNS & ASSEMBLY


Diamond Pattern

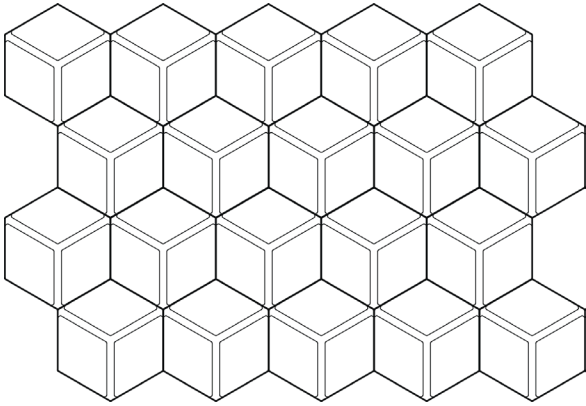

Honeycomb Pattern

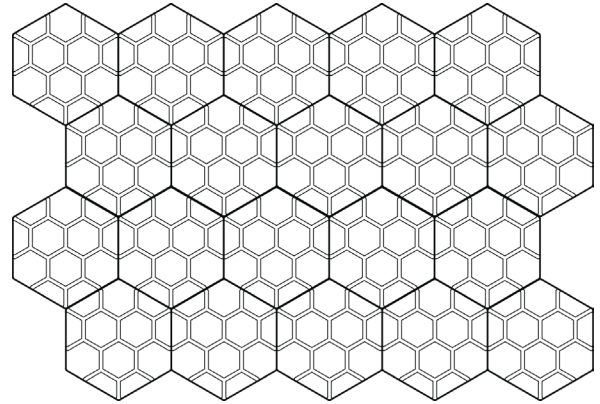

## INSTALLATION

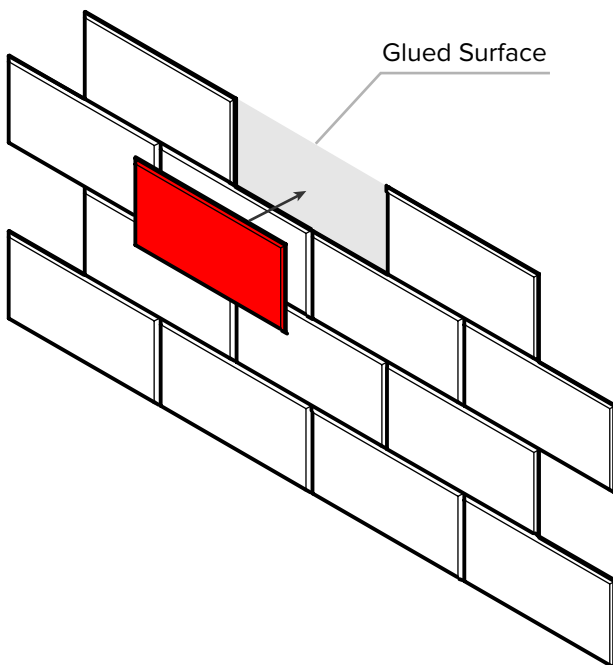

Brick Pattern

### Installation Recommendations

1. Make sure the surface is clean, dry and dust free.
2. Joins, cracks and gaps on the surface need to be repaired before installation.
3. Make sure there are no traces of mould prior to applying the adhesive. If there are, treat the surface accordingly to eliminate it.
4. Use a high quality heavy-duty clear adhesive with low water content and remove any spills as you go. 3M VHB tape can also be used.
5. Apply sealers and adhesives following the manufacturers instructions.
6. Apply pressure immediately after applying each tile, from the center to each side.
7. Please keep the temperature of the installation area above 10°C at all times.

Luxxbox reserves the right to change the specification, material and colors at any time without notice. Standard warranty terms and conditions apply. All rights reserved. © September 2018 Ver 1.1

LUXXBOX PTY LTD × ACN 123 193 788 × 43 KENYON ST EAGLE FARM QLD 4009 AUSTRALIA  
P +61 7 3257 2822 × INFO@LUXXBOX.COM × LUXXBOX.COM  
P +1 (415) 871 0448 × USA@LUXXBOX.COM

**luxx**  
**box**