



# HEMII (LX-HI)

TYPE:

## KEY FEATURES

- Internal and external noise-absorbing materials for enhanced acoustics
- A high-performance dimmable circular edge-lit LED panel
- Two sizes and 77 exterior wool colors
- Interior color always in Light Grey
- A minimalistic design that blends seamlessly into existing design features
- Thermo-formed felt shell manufactured from recycled plastics
- Hand-upholstered exterior from rapidly renewable and biodegradable wool
- Height adjustable 9' / 3m suspension cables and Black woven power cable
- IES photometric files available
- L70 lifetime rating of 50,000 hours


## OPTIONAL EXTRAS

- Additional options available upon request:
- POE
  - Bluetooth controller (US & EU only)
  - Tunable White output
  - White canopy and power cord


## SIZE AND OUTPUT

	MEDIUM	LARGE
Lumen Output	3476 lm	3850 lm
Wattage	41.9 W	48 W
Efficacy	82.9 lm/W	80 lm/W
CRI	90+	
CCT	3000, 3500, 4000 K	
UGR	<19	

MEDIUM (M)

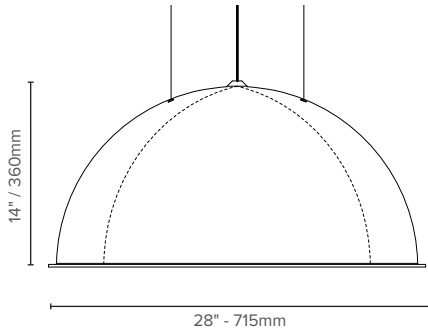

LARGE (L)

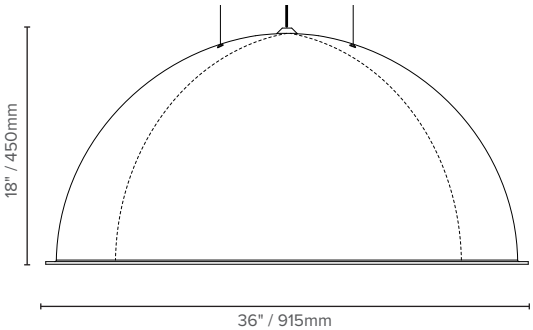

## ORDER CODE

### EXAMPLE FOR STANDARD LED PANEL: LX - HI - L - 2W - 40 - UNV - RD

(Luxbox Hemii, Large - dia 36" x 18" / dia 915 x 450 mm, Wool option 2W, 4000K, Universal 120-277V / 0-10V 1% dimming, Remote driver)

### EXAMPLE FOR E26/27 LAMP HOLDER: LX - HI - M - SG - E26

(Luxbox Hemii, Medium - dia 28" x 14" / dia 715 x 360 mm, Wool option 2W, E26 lamp holder (120V AC))

LX - HI									
PRODUCT CODE	SIZE		*SHADE COLOR	COLOR TEMP		DRIVER / DIMMING		DRIVER TYPE	
HI	M	Medium 28" x 14" / 715mm x 360mm	Use color codes as shown	30	3000K	UNV	0 - 10V - 1% dimming (120-277V) (North America only)	CD	Canopy concealed driver (UNV/North America only)
	L	Large 36" x 18" / 915mm x 450mm		35	3500K	G	1% dimming DSI/DALI (220 - 240V)**	RD	Remote driver (UNV or G)
				40	4000K				
				*E26	E26 Lamp holder - 120V AC (North America only)				
				*E27	E27 Lamp holder - 220-240V AC (Global)				

\* Please note the light globe or driver will not be supplied with the E26/E27 option for this fixture. | \*\* Global (G) dimming type is only available with Remote driver (RD)

Luxbox reserves the right to change the specification, material and colors at any time without notice. Standard warranty terms and conditions apply. All rights reserved © All dimensions and values on specification sheet are nominal. Colors are subject to lead times and variations across batches. Birdcage Hemii product code LX-BC-HI. April 2024. LX-Hemii-Spec-Sheet v5.4



LUXBOX USA INC × (P)+1 (415) 871 0448 × USA@LUXBOX.COM  
LUXBOX PTY LTD × (P)+61 7 3257 2822 × INFO@LUXBOX.COM  
WWW.LUXBOX.COM





BIRDCAGE

# HEMII (LX-HI)

TYPE:

## WOOL UPHOLSTERED

4M	2T	4T	4C	3V	21	3W	3Q	4N
18	13	39	63	90	3P	3T	4Q	3N
4L	3L	4U	3S	82	4R	3M	2W	58
1F	1K	1L	53	3U	1N	3Y	3R	4V
3A	4F	4E	4G	33	4K	4S	1R	2C
4J	4B	3B	1P	1W	3Z	4H	1V	2U
02	4P	3X	1Y	3X	09	62	08	67
12	35	30	1J	1E	28	12	31	4D
4A	4X	86	47	2Q				

### NOTE:

The standard colour for the interior of the shade is **ALWAYS** Silver Grey(SG).



SG

Luxbox reserves the right to change the specification, material and colors at any time without notice. Standard warranty terms and conditions apply. All rights reserved © All dimensions and values on specification sheet are nominal. Colors are subject to lead times and variations across batches. Birdcage Hemii product code LX-BC-HI. April 2024. LX-Hemii-Spec-Sheet v5.4



LUXBOX USA INC × (P)+1 (415) 871 0448 × USA@LUXBOX.COM  
LUXBOX PTY LTD × (P)+61 7 3257 2822 × INFO@LUXBOX.COM  
WWW.LUXBOX.COM





BIRDCAGE

# HEMII (LX-HI)

TYPE:

## PHOTOMETRICS


	MEDIUM	LARGE
Delivered Lumen Output	3476 lm	3850 lm
Wattage	41.9 W	48 W
Efficacy	82.9 lm/W	80 lm/W
Luminous Intensity Distribution		
CRI	90+	
CCT	3000, 3500, 4000 K	
UGR	<19	

## TM-30METRICS





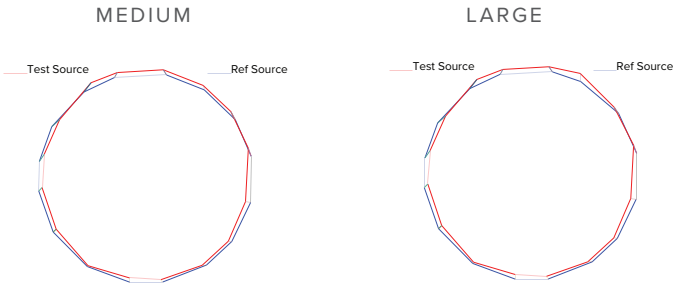


Fidelity Index (Rf): Average similarity to the reference source for all colors  
Gamut Index (Rg): Average change in chroma for all colors

	MEDIUM	LARGE
Rf (Fidelity Index)	90.135	90.7
Rg (Gamut Index)	97.711	98.8

## COLOR VECTOR GRAPHIC



## DRIVER SPECS

REGION/DIMMING	SIZE	WATTAGE (W)	MAX VOLTAGE (V)	COMPLIANCE
UNIVERSAL (UNV) 0-10V - 1% dimming 110 - 277VAC (North America only)	MEDIUM	48W	30-42V	 
	LARGE			
GLOBAL (G) 0-10V - 1% dimming 220 - 240VAC DSI DALI	MEDIUM	48W	18-54V	    
	LARGE			

Luxbox reserves the right to change the specification, material and colors at any time without notice. Standard warranty terms and conditions apply. All rights reserved © All dimensions and values on specification sheet are nominal. Colors are subject to lead times and variations across batches. Birdcage Hemii product code LX-BC-HI. April 2024. LX-Hemii-Spec-Sheet v5.4



LUXBOX USA INC × (P)+1 (415) 871 0448 × USA@LUXBOX.COM  
LUXBOX PTY LTD × (P)+61 7 3257 2822 × INFO@LUXBOX.COM  
WWW.LUXBOX.COM





TYPE:

## PRODUCT ACOUSTIC PROPERTIES


Testing and post analysis procedures were carried out in accordance with the references detailed below:

AS ISO 354-2006 (R2016)	Acoustics—Measurement of sound absorption in a reverberation room
AS ISO 11654—2002	Rating of sound absorption—Materials and systems
ASTM C423-17	Standard Test Method for Sound Absorption and Sound Absorption Coefficients by the Reverberation Room Method
ASTM E795-16	Standard Practices for Mounting Test Specimens During Sound Absorption Tests
ISO 20189	Screens, furniture and single objects intended for interior use – Rating of sound absorption and sound reduction of elements based on laboratory measurements.

Below you'll find the data for both sizes of this product in Imperial and Metric units. Please note we this data has been extrapolated from the results obtained in the testing of the Medium Helm pendant as we are using the same combination of materials in both products.


### IMPERIAL SABINS

Frequency (Hz)	Sound Absorption Coefficient	MEDIUM (M)	LARGE (L)
125	0.03	0.28	0.46
250	0.64	5.22	8.55
500	0.40	3.28	5.37
1000	0.58	4.75	7.78
2000	0.65	5.31	8.71
4000	0.78	6.33	10.38

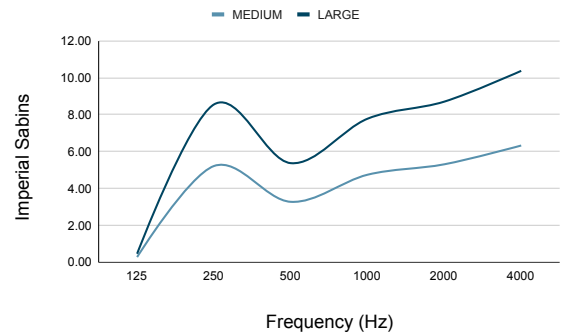

### METRIC SABINS

Frequency (Hz)	Sound Absorption Coefficient	MEDIUM (M)	LARGE (L)
125	0.03	0.03	0.04
250	0.64	0.48	0.79
500	0.40	0.30	0.50
1000	0.58	0.44	0.72
2000	0.65	0.49	0.81
4000	0.78	0.59	0.96

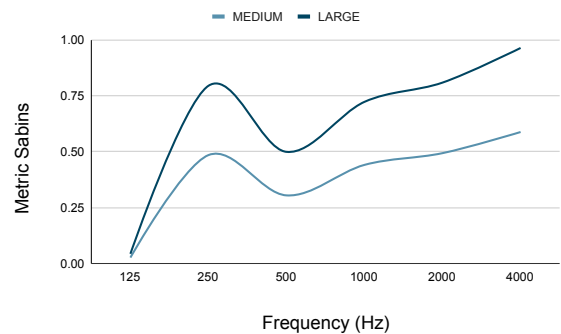

The Sabin data shown above is in accordance with the latest International Standards for the rating of sound absorption and reduction. This is different from the classic methodology, which includes the calculation of the Noise Reduction Coefficient (NRC), the Sound Absorption Average (SAA), the Weighted Sound Absorption Coefficient (**aw**) and the Sound Absorption Class (SAC). However, to make it easier to compare against other products, we are including that information on the table on the right, which was calculated using the Largest Single Face method. Fully detailed test reports are available upon request.

NRC	0.6
SAA	0.58
aw	0.60
SAC	C

Luxxbox reserves the right to change the specification, material and colors at any time without notice. Standard warranty terms and conditions apply. All rights reserved © All dimensions and values on specification sheet are nominal. Colors are subject to lead times and variations across batches. Birdcage Hemii product code LX-BC-HI. April 2024. LX-Hemii-Spec-Sheet v5.4




BIRDCAGE

# HEMII (LX-HI)



TYPE:

## PRODUCT DIMENSIONS

MEDIUM

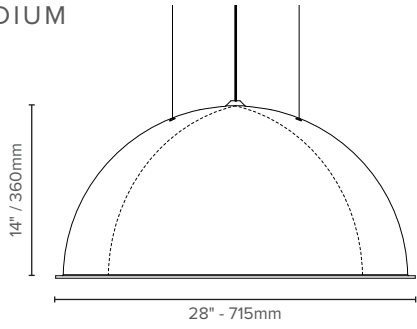


LARGE

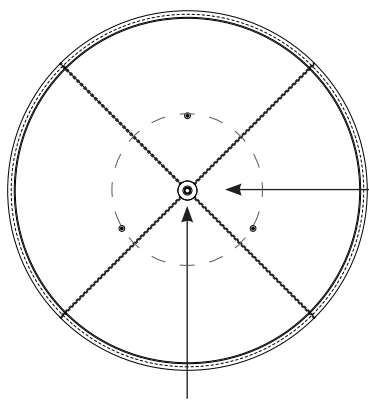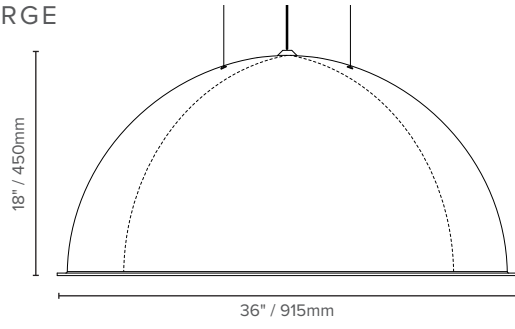

PCD = 12.5" / 317.5mm  
3 points equally spaced  
at 120°

Power Cable centered  
with fixture

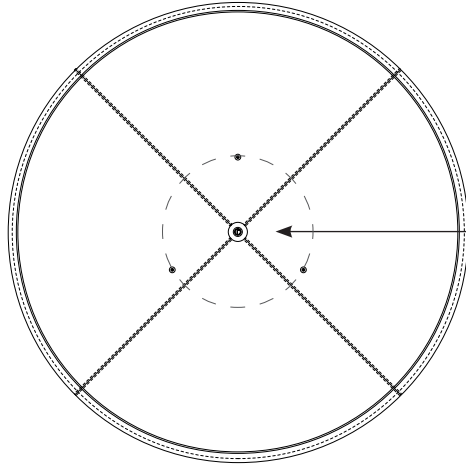


PCD = 12.5" / 317.5mm  
3 points equally spaced  
at 120°

## CANOPY INFORMATION


Please note power cord and canopy will always be supplied in black unless specified otherwise.

PRODUCT	SIZE	OUTPUT	UNIVERSAL (UNV)			GLOBAL (G)	
			RD	CD	E26	RD	E27
LX-HI	ALL SIZES	D	SA5	CD5	SA5	SB1	SB1


SA5

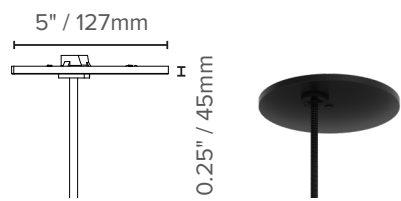

CD5

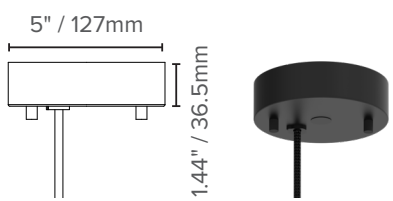

SB1

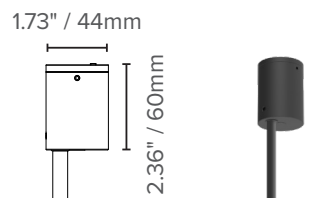

Luxbox reserves the right to change the specification, material and colors at any time without notice. Standard warranty terms and conditions apply. All rights reserved © All dimensions and values on specification sheet are nominal. Colors are subject to lead times and variations across batches. Birdcage Hemii product code LX-BC-HI. April 2024. LX-Hemii-Spec-Sheet v5.4



LUXBOX USA INC × (P)+1 (415) 871 0448 × USA@LUXBOX.COM  
LUXBOX PTY LTD × (P)+61 7 3257 2822 × INFO@LUXBOX.COM  
WWW.LUXBOX.COM

