


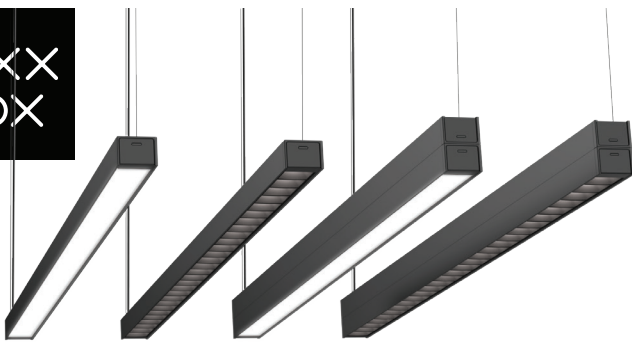

LINEA NAKED (LX-NL)

TYPE: LX-NL-

KEY FEATURES


- High performance dimmable LED light source with 3 direct output options.
- Available in multiple lengths
- UGR <5 on direct louvered output
- 2 available finishes: Black and Silver
- Complements Linea and Tessell
- Height adjustable 9' / 2740mm suspension cables and Black woven power cable
- IES / LDT photometric files available

OPTIONAL EXTRAS

- Additional options available upon request:
- POE
 - Casambi Bluetooth controller (US)
 - Tunable White output
 - White canopy and power cord
 - Surface mounting option
 - Connecting bracket for longer runs.
 - BABA Act Certificate


SIZE AND OUTPUT

SIDE VIEW

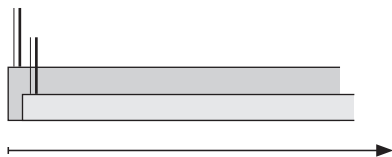

Length in 12"/305mm increments (see pg.4 for specifics)


FRONT VIEW




Width = 1.8" / 45mm for all

OPTICS

Louvered (DA/DB)



Diffused (DC)




Lensed (I)




FINISHES

Black (B)



Silver (S)



OUTPUT: PER METER | PER FOOT

	Delivered Lumen Output (per meter per foot)			Beam Angle		Wattage (W/m W/ft)	Efficacy (lm/W)	CRI	UGR	CCT
	DOWN	UP	TOTAL	DOWN	UP					
DA	3420 lm/m 1060 lm/ft	-	3420 lm/m 1060 lm/ft	50°	-	26W/m 8W/ft	133	90+	<5	3000K 3500K 4000K
DB	3326 lm/m 1031 lm/ft	-	3326 lm/m 1031 lm/ft	76°	-	26W/m 8W/ft	129		<5	
DC	2620 lm/m 812 lm/ft	-	2620 lm/m 812 lm/ft	100°	-	40W/m 13W/ft	75.5		<19	
I	-	3113 lm/m 965 lm/ft	3113 lm/m 965 lm/ft	-	160°	26W/m 8W/ft	121		-	
DIA	3420 lm/m 1060 lm/ft	3113 lm/m 965 lm/ft	6533 lm/m 2025 lm/ft	50°	160°	52W/m 16W/ft	127		<5	
DIB	3326 lm/m 1031 lm/ft	3113 lm/m 965 lm/ft	6439 lm/m 1996 lm/ft	76°	160°	52W/m 16W/ft	125		<5	
DIC	2620 lm/m 812 lm/ft	3113 lm/m 965 lm/ft	5733 lm/m 1777 lm/ft	100°	160°	65W/m 21W/ft	94.7		<19	

ORDER CODE

EXAMPLE: LX - NL - 8 - B - 40 - DIA - G - RD

(Luxbox Linea Naked, Length 8 (2261mm / 89"), Black finish, 4000K, Direct A + Indirect output, Global 220-240V 1% DSi/DALI dimming, Remote driver)

LX - NL						
PRODUCT CODE	LENGTH	FINISH	COLOR TEMP	OUTPUT*	REGION / DIMMING	DRIVER TYPE
NL	Use length code as shown on pg. 3	B S Black Silver	30 35 40 3000K 3500K 4000K	DA Direct A (50°, louvered) DB Direct B (76°, louvered) DC Direct C (100°, Lensed) I Indirect (160°, Lensed) DIA Direct A + Indirect DIB Direct B + Indirect DIC Direct C + Indirect	UNV 110-277V 0-10V - 1% dimming (North America) G** 220-240V 1% dimming DSi/DALI	CD Canopy concealed driver (UNV/North America) RD Remote driver (UNV or G)


*See pg.2 for more information about the different Output options | ** Global (G) dimming type is available with Remote driver (RD) only

Luxbox reserves the right to change the specification, material and colors at any time without notice. Standard warranty terms and conditions apply. All rights reserved © All dimensions and values on specification sheet are nominal. June 2025. LX-Linea-Naked-Spec-Sheet_A4 v1.0



LUXBOX USA INC
(P)+1 (415) 871 0448 × USA@LUXBOX.COM
WWW.LUXBOX.COM



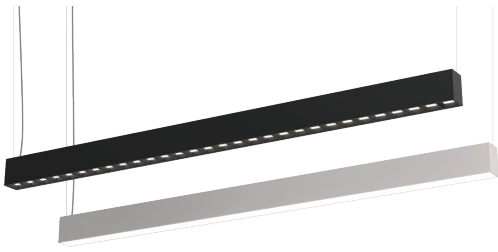

LINEA NAKED (LX-NL)


TYPE: LX-NL-

PHOTOMETRICS: PER METER / FOOT

LIGHT SOURCE SPECIFICATIONS - PER METER / FOOT

	Delivered Lumen Output (per meter per foot)			Beam Angle		Wattage (W/m W/ft)	Efficacy (lm/W)	CRI	UGR	CCT
	DOWN	UP	TOTAL	DOWN	UP					
DA	3420 lm/m 1060 lm/ft	-	3420 lm/m 1060 lm/ft	50°	-	26W/m 8W/ft	133	90+	<5	3000K 3500K 4000K
DB	3326 lm/m 1031 lm/ft	-	3326 lm/m 1031 lm/ft	76°	-	26W/m 8W/ft	129		<5	
DC	2620 lm/m 812 lm/ft	-	2620 lm/m 812 lm/ft	100°	-	40W/m 13W/ft	75.5		<19	
I	-	3113 lm/m 965 lm/ft	3113 lm/m 965 lm/ft	-	160°	26W/m 8W/ft	121		-	
DIA	3420 lm/m 1060 lm/ft	3113 lm/m 965 lm/ft	6533 lm/m 2025 lm/ft	50°	160°	52W/m 16W/ft	127		<5	
DIB	3326 lm/m 1031 lm/ft	3113 lm/m 965 lm/ft	6439 lm/m 1996 lm/ft	76°	160°	52W/m 16W/ft	125		<5	
DIC	2620 lm/m 812 lm/ft	3113 lm/m 965 lm/ft	5733 lm/m 1777 lm/ft	100°	160°	65W/m 21W/ft	94.7		<19	

LUMINOUS INTENSITY DISTRIBUTION

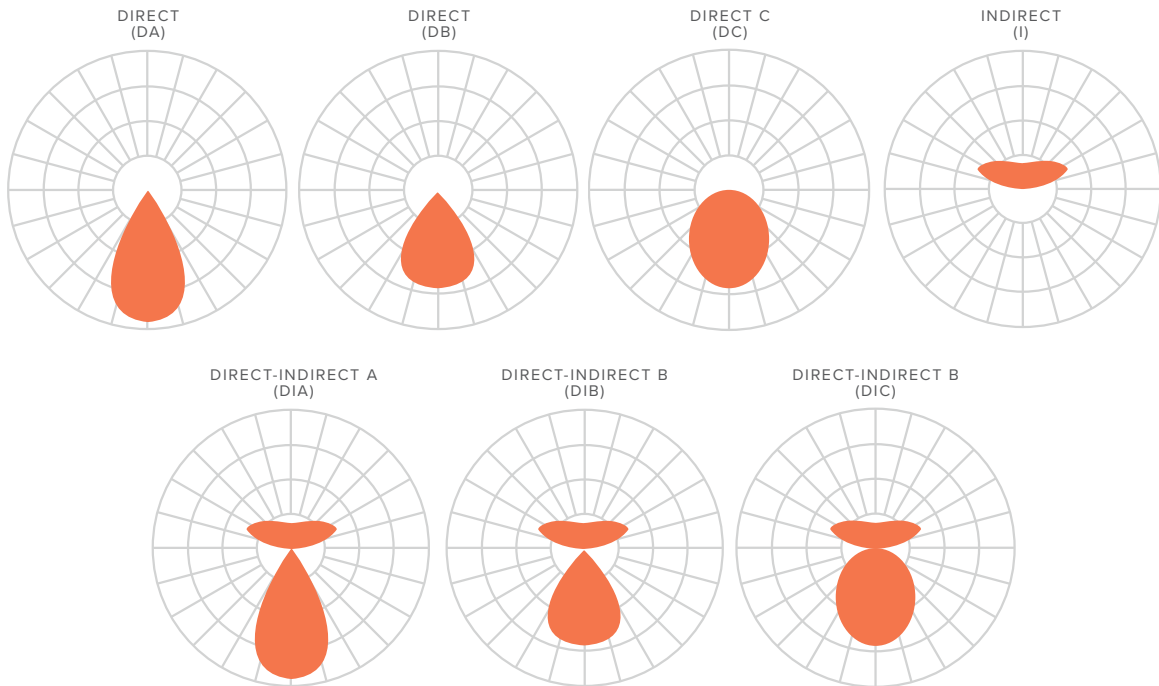


TM-30

Fidelity Index (Rf): Average similarity to the reference source for all colors
Gamut Index (Rg): Average change in chroma for all colors

	DA / DB
Fidelity Index (Rf)	83
Gamut Index (Rg)	96

COLOR VECTOR GRAPHIC

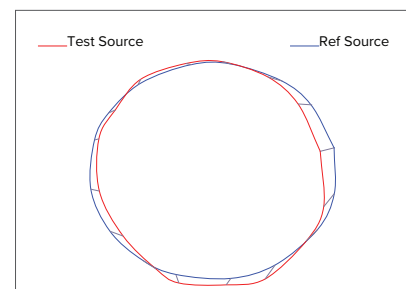


DA / DB / DC / I

Luxxbox reserves the right to change the specification, material and colors at any time without notice. Standard warranty terms and conditions apply. All rights reserved © All dimensions and values on specification sheet are nominal. June 2025. LX-Linea-Naked-Spec-Sheet_A4 v1.0



LUXXBOX USA INC
(P)+1 (415) 871 0448 × USA@LUXXBOX.COM
WWW.LUXXBOX.COM



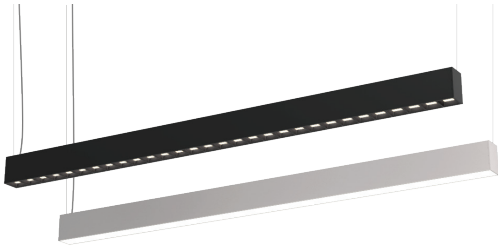

LINEA NAKED (LX-NL)

TYPE: LX-NL-

PHOTOMETRICS: SPECIFIC LENGTHS


LINEA NAKED CODE	OVERALL LENGTH		DA		DB		DC		I		DIA		DIB		DIC	
	ft-in	mm	Lumens (lm)	Wattage (W)	Lumens (lm)	Wattage (W)	Lumens (lm)	Wattage (W)	Lumens (lm)	Wattage (W)	Lumens (lm)	Wattage (W)	Lumens (lm)	Wattage (W)	Lumens (lm)	Wattage (W)
NL-2	1ft-10.8in	580	2120	16	2062	16	1624	21.5	1930	16	4050	32	3992	32	3554	37.5
NL-3	2ft-9.9in	860	3180	24	3093	24	2436	32	2895	24	6075	48	5988	48	5331	56
NL-4	3ft-8.9in	1140	4240	32	4124	32	3248	42.5	3860	32	8100	64	7984	64	7108	74.5
NL-5	4ft-7.9in	1420	5300	40	5155	40	4060	53	4825	40	10125	80	9980	80	8885	93
NL-6	5ft-7in	1701	6360	48	6186	48	4872	63.5	5790	48	12150	96	11976	96	10662	111.5
NL-7	6ft-6in	1981	7420	56	7217	56	5684	74	6755	56	14175	112	13972	112	12439	130
NL-8	7ft-5in	2261	8480	64	8248	64	6496	84.5	7720	64	16200	128	15968	128	14216	148.5
NL-9	8ft-4.8in	2560	9540	72	9279	72	7308	95	8685	72	18225	144	17964	144	15993	167
NL-10	9ft-5.4in	2880	10600	80	10310	80	8120	105.5	9650	80	20250	160	19960	160	17770	185.5
NL-11	10ft-2.9in	3121	11660	88	11341	88	8932	116	10615	88	22275	176	21956	176	19547	204
NL-12	11ft-1.9in	3402	12720	96	12372	96	9744	126.5	11580	96	24300	192	23952	192	21324	222.5
NL-13	12ft-1in	3682	13780	104	13403	104	10556	137	12545	104	-	-	-	-	-	-
NL-14	13ft-0in	3962	14840	112	14434	112	11368	147.5	13510	112	-	-	-	-	-	-
NL-15	13ft-11in	4242	15900	120	15465	120	12180	158	14475	120	-	-	-	-	-	-
NL-16	14ft-10in	4522	16960	128	16496	128	12992	168.5	15440	128	-	-	-	-	-	-
NL-17	15ft-9.8in	4822	18020	136	17527	136	13804	179	16405	136	-	-	-	-	-	-
NL-18	16ft-8.9in	5103	19080	144	18558	144	14616	189.5	17370	144	-	-	-	-	-	-
NL-19	17ft-7.9in	5383	20140	152	19589	152	15428	200	18335	152	-	-	-	-	-	-
NL-20	18ft-7in	5663	21200	160	20620	160	16240	210.5	19300	160	-	-	-	-	-	-
NL-21	19ft-6in	5943	22260	168	21651	168	17052	221	20265	168	-	-	-	-	-	-
NL-22	20ft-5in	6223	23320	176	22682	176	17864	231.5	21230	176	-	-	-	-	-	-

Luxxbox reserves the right to change the specification, material and colors at any time without notice. Standard warranty terms and conditions apply. All rights reserved © All dimensions and values on specification sheet are nominal. June 2025. LX-Linea-Naked-Spec-Sheet_A4 v1.0



LUXXBOX USA INC
(P)+1 (415) 871 0448 × USA@LUXXBOX.COM
WWW.LUXXBOX.COM



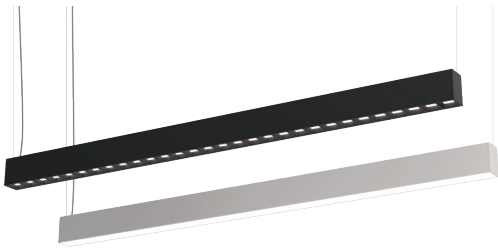

LINEA NAKED (LX-NL)

TYPE: LX-NL-


DRIVER INFORMATION

		MAX WATTAGE (W)				MAX VOLTAGE (V)	COMPLIANCE
		DA / DB	DC	DIA / DIB	DIC		
UNIVERSAL (UNV) 0-10V - 1% dimming 110 - 277 VAC (North America only)	LX-NL-2	16 W	21 W	32 W	37 W	40V	  
	LX-NL-3	24 W	31.5 W	48 W	55.5 W		
	LX-NL-4	32 W	42 W	64 W	74 W		
	LX-NL-5	40 W	52.5 W	80 W	92.5 W		
	LX-NL-6	48 W	63 W	96 W	111 W		
	LX-NL-7	56 W	73.5 W	112 W	129.5 W		
	LX-NL-8	64 W	84 W	128 W	148 W		
GLOBAL (G) 1% DSI/DALI dimming 220 - 240 VAC	LX-NL-2	16 W	21 W	32 W	37 W	40V	    
	LX-NL-3	24 W	31.5 W	48 W	55.5 W		
	LX-NL-4	32 W	42 W	64 W	74 W		
	LX-NL-5	40 W	52.5 W	80 W	92.5 W		
	LX-NL-6	48 W	63 W	96 W	111 W		
	LX-NL-7	56 W	73.5 W	112 W	129.5 W		
	LX-NL-8	64 W	84 W	128 W	148 W		

CANOPY INFORMATION

Please note power cord and canopy will always be supplied in black unless specified otherwise. As you can see on the diagrams, Linea Naked pendants are supplied with a canopy that includes both a Power Cable and a Suspension Cable. The Suspension Cable is centered with the canopy for an easier installation. Please note the Canopy and Power cable can be shipped in advance if needed. You will find more detailed information about the suspension point locations on pg. 6

			OUTPUT & LENGTHS APPLICABLE			
REGION/DIMMING	DRIVER TYPE	CANOPY	DA / DB	DC	DIA / DIB	DIC
UNV	CD	CD5	LX-NL-2 to LX-NL-6	LX-NL-2 to LX-NL-4	LX-NL-2 to LX-NL-3	LX-NL-2
		CD9R	LX-NL-7 to LX-NL-16	LX-NL-5 to LX-NL-16	LX-NL-4 to LX-NL-12	LX-NL-3 to LX-NL-12
	RD	SA5	All	All	All	All
G	RD	SB4	All	All	All	All

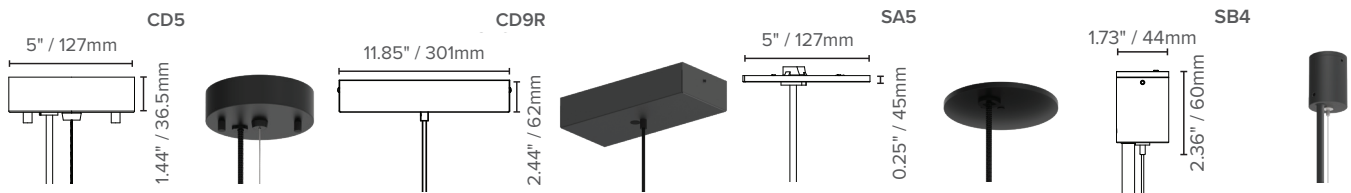


Luxxbox reserves the right to change the specification, material and colors at any time without notice. Standard warranty terms and conditions apply. All rights reserved © All dimensions and values on specification sheet are nominal. June 2025. LX-Linea-Naked-Spec-Sheet_A4 v1.0



LUXXBOX USA INC
(P)+1 (415) 871 0448 × USA@LUXXBOX.COM
WWW.LUXXBOX.COM



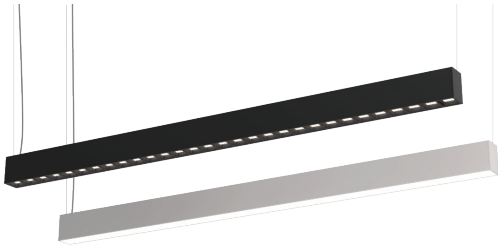

LINEA NAKED (LX-NL)

TYPE: LX-NL-

PRODUCT CONFIGURATION

MODULES

Each pendant from NL-2 to NL-8 consists of a single stand-alone fitting. Longer pendants will be assembled using multiple fittings.

Configuration column legend:

- S: Stand Alone fitting
- P: Powered End fitting
- E: Unpowered End fitting

DOUBLE CEILING MOUNTS

To make installation fast and safe, the Linea Naked pendants above 91" will be supplied with a Double Ceiling Mount.

This means you'll be able to fix two suspension cables to one ceiling mount, which decreases the installation time significantly.


LINEA NAKED CODE	OVERALL LENGTH			CONFIGURATION	# OF FITTINGS	SUSPENSION POINTS	OUTPUT / SHIELDING OPTIONS
	ft-in	in	mm				
NL-2	1ft-10.8in	23	580	2S	1	2	DA / DB / DC / I / DIA / DIB / DIC / A
NL-3	2ft-9.9in	34	860	3S	1	2	DA / DB / DC / I / DIA / DIB / DIC / A
NL-4	3ft-8.9in	45	1140	4S	1	2	DA / DB / DC / I / DIA / DIB / DIC / A
NL-5	4ft-7.9in	56	1420	5S	1	2	DA / DB / DC / I / DIA / DIB / DIC / A
NL-6	5ft-7in	67	1701	6S	1	2	DA / DB / DC / I / DIA / DIB / DIC / A
NL-7	6ft-6in	78	1981	7S	1	2	DA / DB / DC / I / DIA / DIB / DIC / A
NL-8	7ft-5in	89	2261	8S	1	2	DA / DB / DC / I / DIA / DIB / DIC / A
NL-9	8ft-4.8in	101	2560	5P - 4E	2	4	DA / DB / DC / I / A
NL-10	9ft-5.4in	113	2880	5P- 5E	2	4	DA / DB / DC / I / A
NL-11	10ft-2.9in	123	3121	6P- 5E	2	4	DA / DB / DC / I / A
NL-12	11ft-1.9in	134	3402	6P - 6E	2	4	DA / DB / DC / I / A
NL-13	12ft-1in	145	3682	7P - 6E	2	4	DA / DB / DC / I / A
NL-14	13ft-0in	156	3962	7P - 7E	2	4	DA / DB / DC / I / A
NL-15	13ft-11in	167	4242	8P - 7E	2	4	DA / DB / DC / I / A
NL-16	14ft-10in	178	4522	8P- 8E	2	4	DA / DB / DC / I / A
NL-17	15ft-9.8in	190	4822	6P - 5M - 6E	3	6	DA / DB / DC / I / A
NL-18	16ft-8.9in	201	5103	6P - 6M - 6E	3	6	DA / DB / DC / I / A
NL-19	17ft-7.9in	212	5383	6P - 7M - 6E	3	6	DA / DB / DC / I / A
NL-20	18ft-7in	223	5663	6P - 8M - 6E	3	6	DA / DB / DC / I / A
NL-21	19ft-6in	234	5943	7P - 7M - 7E	3	6	DA / DB / DC / I / A
NL-22	20ft-5in	245	6223	7P - 8M - 7E	3	6	DA / DB / DC / I / A

Luxxbox reserves the right to change the specification, material and colors at any time without notice. Standard warranty terms and conditions apply. All rights reserved © All dimensions and values on specification sheet are nominal. June 2025. LX-Linea-Naked-Spec-Sheet_A4 v1.0



LUXXBOX USA INC
(P)+1 (415) 871 0448 × USA@LUXXBOX.COM
WWW.LUXXBOX.COM



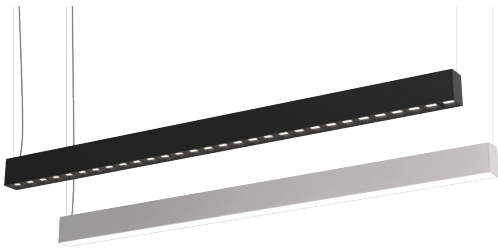

LINEA NAKED (LX-NL)

TYPE: LX-NL-

MODULE DIMENSIONS & SUSPENSION POINTS

STANDALONE MODULES (S)

MODULE CODE	OVERALL LENGTH			SUSPENSION POINTS
	Imperial (ft-in)	Imperial (in)	Metric (mm)	
2S	1ft-10.8in	22.8	580	2
3S	2ft-9.9in	33.9	860	2
4S	3ft-8.9in	44.9	1140	2
5S	4ft-7.9in	55.9	1420	2
6S	5ft-7in	67.0	1701	2
7S	6ft-6in	78.0	1981	2
8S	7ft-5in	89.0	2261	2


SUSPENSION POINT LOCATIONS
STANDALONE (S)



POWERED AND UNPOWERED END MODULES

MODULE CODE	OVERALL LENGTH			SUSPENSION POINTS
	Imperial (ft-in)	Imperial (in)	Metric (mm)	
2E / 2P	1ft-10.7in	22.7	576	2
3E / 3P	2ft-9.7in	33.7	856	2
4E / 4P	3ft-8.7in	44.7	1136	2
5E / 5P	4ft-7.7in	55.7	1416	2
6E / 6P	5ft-6.8in	66.8	1697	2
7E / 7P	6ft-5.8in	77.8	1977	2
8E / 8P	7ft-4.9in	88.9	2257	2

SUSPENSION POINT LOCATIONS
POWERED (P) AND UNPOWERED END (E)

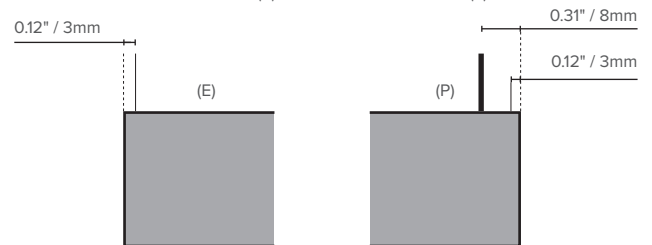

Note: The distance from the edge of the fixture to the suspension point is the same whether the End fitting is powered or unpowered

Luxxbox reserves the right to change the specification, material and colors at any time without notice. Standard warranty terms and conditions apply. All rights reserved © All dimensions and values on specification sheet are nominal. June 2025. LX-Linea-Naked-Spec-Sheet_A4 v1.0



LUXXBOX USA INC
(P)+1 (415) 871 0448 × USA@LUXXBOX.COM
WWW.LUXXBOX.COM

